


SULZER

Guideline *How to:*

AquaProg and AquaWeb



Sulzer Digital Solutions
C&M Team, Monitoring & Control and Asset Enhancement




AquaProg / AquaWeb Connectivity

AquaProg communication *AquaWeb Gateway*

- To use AquaWeb Gateway, the station need to exist in AquaWeb.
- You also need to be a user in the AquaWeb organization you are about to visit and have your AquaWeb credentials available. In AquaProg, just click on the blue icon for *Open AquaWeb station*.



A new dialog box appears. First time, click on “Setup”

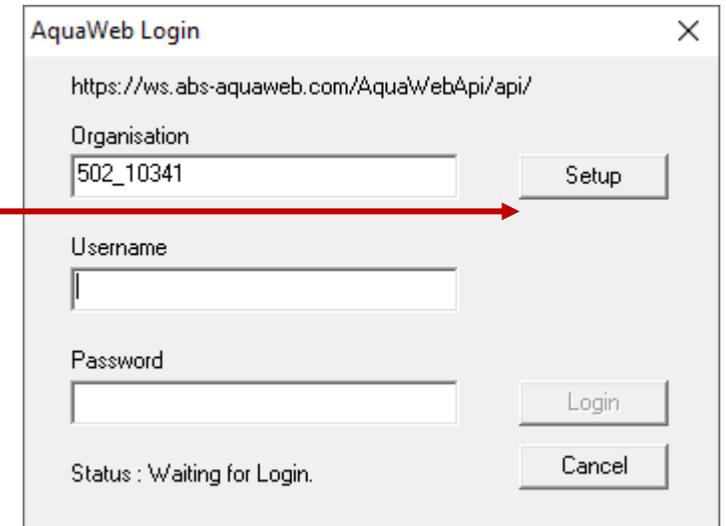



AquaProg / AquaWeb Connectivity

AquaProg communication *AquaWeb Gateway*

First time when using *Aquaweb Gateway*, fill in according to the instruction below

- Organization, same as “*Contract number*”
- Your Aquaweb logon credentials, *username*
- Use the drop list to select your local IP-address
- Click on “Save”

The screenshot shows the 'AquaWeb Setup' dialog box with the following fields and controls:

- AquaWeb URL:** A text input field containing the URL `https://ws.abs-aquaweb.com/AquaWebApi/api/`.
- Default Organisation:** A text input field that is currently empty. A 'Set default' button is located to its right.
- Default Username:** A text input field that is currently empty.
- Local IP Address (Host IP):** A dropdown menu showing the selected IP address `192.168.1.107`.
- Buttons:** 'Save' and 'Cancel' buttons are located at the bottom right of the dialog.

Four blue arrows originate from the list items on the left and point to the 'Default Organisation' field, the 'Default Username' field, the 'Local IP Address' dropdown, and the 'Save' button respectively.



AquaProg / AquaWeb Connectivity

AquaProg communication *AquaWeb Gateway*

- Your organization, user, local IP-address and your AquaWeb password.

AquaWeb Login

https://ws.abs-aquaweb.com/AquaWebApi/api/

Organisation
502_10341

Username
XX

Password
xxxxxxxxxx

Status : Waiting for Login.

Buttons: Setup, Login, Cancel

- Fill in your AquaWeb Password
- Click on “*Login*”



AquaProg / AquaWeb Connectivity

Station list

- Pick a station from the AquaWeb stations list and open it

The screenshot shows the 'Your AquaWeb Stations' window with a table of stations. A blue arrow points from the third row of the table to a dialog box titled 'Open AquaWeb Station Sulzer EC 531'. The dialog box contains fields for 'Stationtype:EC531', 'Description', and 'Type and Version' (set to 'EC531V100').

Your AquaWeb Stations						
Select Station to Open						
1	Id: 1	Name: Sulzer PCx	Type: CPU30	Protocol: MODBUS		[read/write]
2	Id: 40	Name: Sulzer PC 242	Type: PC242	Protocol: MODBUS	Online	[read/write]
3	Id: 327	Name: Sulzer EC 531	Type: EC531	Protocol: MODBUS	Online	[read/write]
4	Id: 623	Name: Sulzer PC 441	Type: PC441	Protocol: MODBUS	Online	[read/write]
5	Id: 6042	Name: Sulzer CP 216	Type: CP116/216	Protocol: MODBUS	Online	[read/write]

Search station name or Id.

Open Station

Open AquaWeb Station Sulzer EC 531

Stationtype:EC531

Description

Type and Version

Open

Quit

Search station name or Id.

Open Station

Quit




AquaProg / AquaWeb Connectivity

Call up and establish contact



Call up

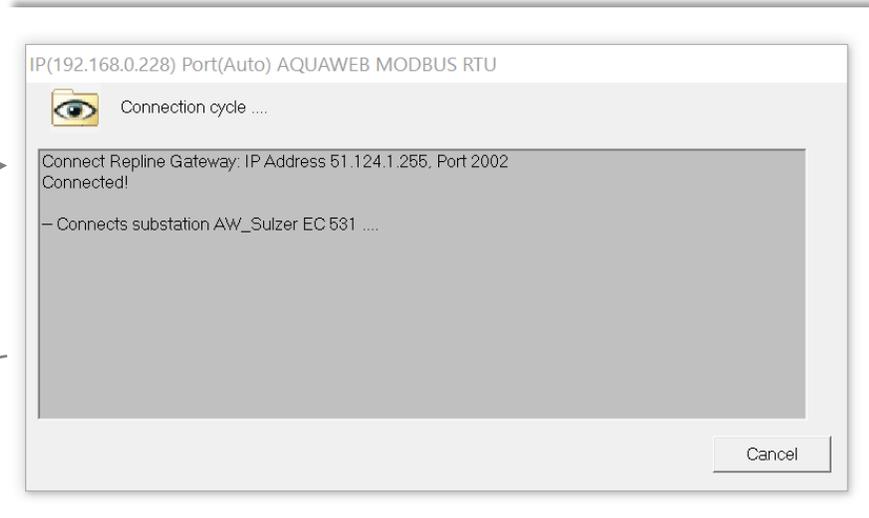

Conneted



Configure station

